



SUPER-LIGHTWEIGHT 3-WAY COMBINATION LADDER FOR THE HOME

VERSATILE DESIGN ALLOWS USE AS A STANDING OR LEANING LADDER

- + Super-lightweight & sturdy aluminium design ensures easy handling
- + 3 modes of operations for ultimate flexibility (see position 1,2 & 3 on next page)
- + Stabiliser as standard to ensure maximum stability
- + Deep serrated rubber feet for maximum grip on all surfaces
- + Locking catch keeps the sections secure during use & storage.

MANUFACTURED TO THE LATEST CUTTING-EDGE STANDARD...

- + Certified to EN131 Non-Professional
- + Meets new improved strength & slip-tests in BS EN131-2:2010 + A2:2017
- + Rated to a maximum load and duty rating of 150kgs
- + 1 Year Manufacturer's Warranty
- + **Extends up to 6.5m high.**



**WHY LFI?
MY WORK.
MY SAFETY.
MY LADDER.**




KNOW YOUR LADDER

STANDING LADDER POSITION



EN131
Non-Professional
Licence No.
Z1180613096083


SPECIFICATION

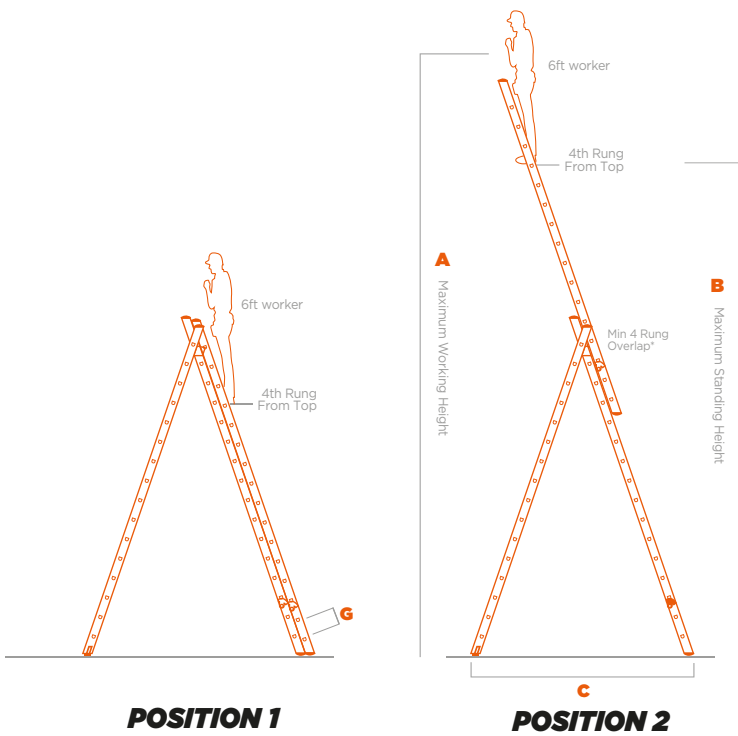

Product SKU	No. of Rungs	A Max Working Height**	B Max Standing Height*	C Open Depth	Weight (kg)
F3TC20	3 x 7	3.1	1.5	1.35	10.5
F3TC25	3 x 9	6.3	2.8	1.7	13.7
F3TC30	3 x 11	7.1	3.3	2.1	17.4

*Max Standing Height is on the 4th tread down
**Max Working Height is calculated as Max Standing Height + 1.6m

LEANING LADDER POSITION

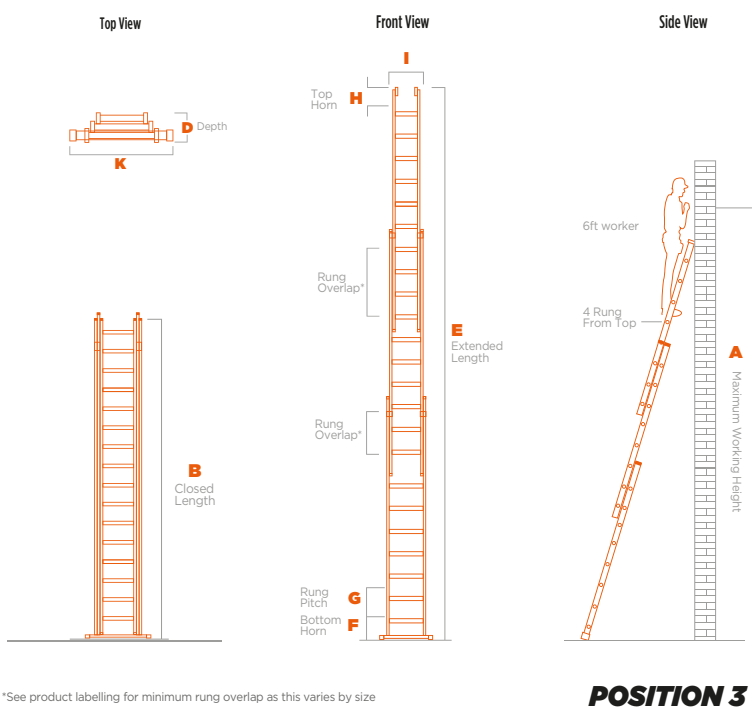

Product SKU	A Max Working Height**	B Closed Length	C Max Standing Height*	D Depth	E Extended Length
F3TC20	4.7	2.0	3.1	0.17	4.0
F3TC25	6.3	2.5	4.7	0.17	5.7
F3TC30	7.1	3.0	5.5	0.17	6.5

COMMON DIMENSIONS

F Bottom Horn	G Rung Pitch	H Top Horn	I Top Section Outside Width	K Stabiliser Length
0.16	0.28	0.15	0.34	0.81

*See product labelling for minimum rung overlap as this varies by size

ALL DIMENSIONS IN METRES

Have an enquiry?

Call us on 01531 820541 or email info@lfi-ladders.co.uk



britishladders.co.uk